

JW-HT108N-R3

n-type Monofacial Single Glass Black Frame Module

430-455W

J-TOPCon
Technology



455W

Maximum Power
Output

22.77%

Maximum Module
Efficiency

0~+3%

Power Output
Tolerance



10-30% Additional Power Generation

30 years lifespan brings 10-30% additional power generation comparing with conventional P-type module



ZERO LID (Light Induced Degradation)

n-type solar cell has no LID naturally which can increase power generation



Higher Reliability

New generation TOPCon technology for the battery, featuring no web coating, no current leakage, and reater resistance to hot spots.



Better Weak Illumination Response

Higher power output even under low-light environments like on cloudy or foggy days



Better Temperature Coefficient

Lower temperature coefficient (-0.30%) and lower working temperature, resulting in more power.



Lighter Module Weight


Reduces weight by more than 20% compared to bifacial double glass module

Munich RE  IEC 



IEC61215(2021), IEC61730(2023), IEC61701, IEC62716
ISO9001:2015: Quality Management System
ISO14001:2015: Environment Management System
ISO45001:2018: Occupational health and safety management systems
IEC62941: 2019: Quality system for PV module manufacturing

Linear Performance Warranty

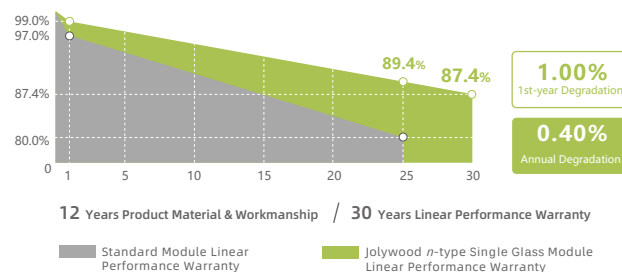

Version 2024.04 © Jolywood (Taizhou) Solar Technology Co., Ltd. All rights reserved.



Electrical Properties | STC*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (P _{max}) (W)	430	435	440	445	450	455
MPP Voltage (V _{mp}) (V)	32.77	32.95	33.13	33.31	33.49	33.67
MPP Current (I _{mp}) (A)	13.12	13.20	13.28	13.36	13.44	13.51
Open Circuit Voltage (V _{oc}) (V)	38.17	38.37	38.57	38.77	38.97	39.17
Short Circuit Current (I _{sc}) (A)	13.93	14.00	14.07	14.14	14.21	14.28
Module Efficiency (%)	21.52	21.77	22.02	22.27	22.52	22.77

*STC: Irradiance 1000 W/m², Cell Temperature 25°C, AM1.5
The data above is for reference only and the actual data is in accordance with the practical testing Power Measurement Tolerance ±3%

Electrical Properties | NMOT*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (P _{max}) (W)	322	326	330	333	337	341
MPP Voltage (V _{mp}) (V)	31.37	31.55	31.72	31.89	32.06	32.24
MPP Current (I _{mp}) (A)	10.27	10.33	10.39	10.45	10.51	10.57
Open Circuit Voltage (V _{oc}) (V)	36.55	36.74	36.93	37.12	37.32	37.51
Short Circuit Current (I _{sc}) (A)	11.25	11.30	11.36	11.42	11.47	11.53

*NMOT: Irradiance 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s

Operating Properties

Operating Temperature (°C)	-40°C~+85°C
Maximum System Voltage (V)	1500V DC (IEC)
Maximum Series Fuse Rating (A)	30
Front Static Load	Snow load 5400Pa, Wind load 2400Pa

Temperature Coefficient

Temperature Coefficient of P _{max} *	-0.300%/°C
Temperature Coefficient of V _{oc}	-0.250%/°C
Temperature Coefficient of I _{sc}	+0.045%/°C
Nominal Operating Cell Temperature (NOCT)	42±2°C

*Temperature Coefficient of P_{max}±0.03%/°C

Mechanical Properties


Number of Cells	108pcs
Module Dimension	1762mm*1134mm*30mm
Weight	21.7kg
Front Glass*	3.2mm Fully strengthened glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 (3 diodes)
Length of Cable	4.0mm ² , +300mm/-180mm (Cable length can be customized)
Packaging Configuration	36pcs/Pallet, 936pcs/40'HQ

Partner Section

NOTE :

*The specification and key features described in this datasheet may deviate slightly and aren't guaranteed. Due to ongoing innovation, R&D enhancement, Jolywood (Taizhou) Solar Technology Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Engineering Drawing (unit: mm)

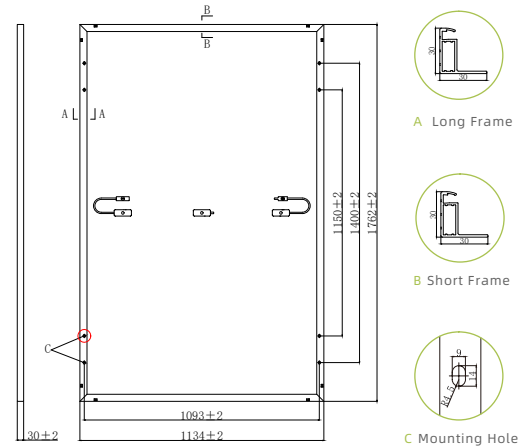

Characteristic Curves | HT108N-450

